Millipore®


www.sigmaaldrich.com

Catalogue Number: PA76/P1

Specification Sheet

NovAseptic® Valve
Inductive Position Indicator Unit

Inductive Position Indicator Unit Configuration

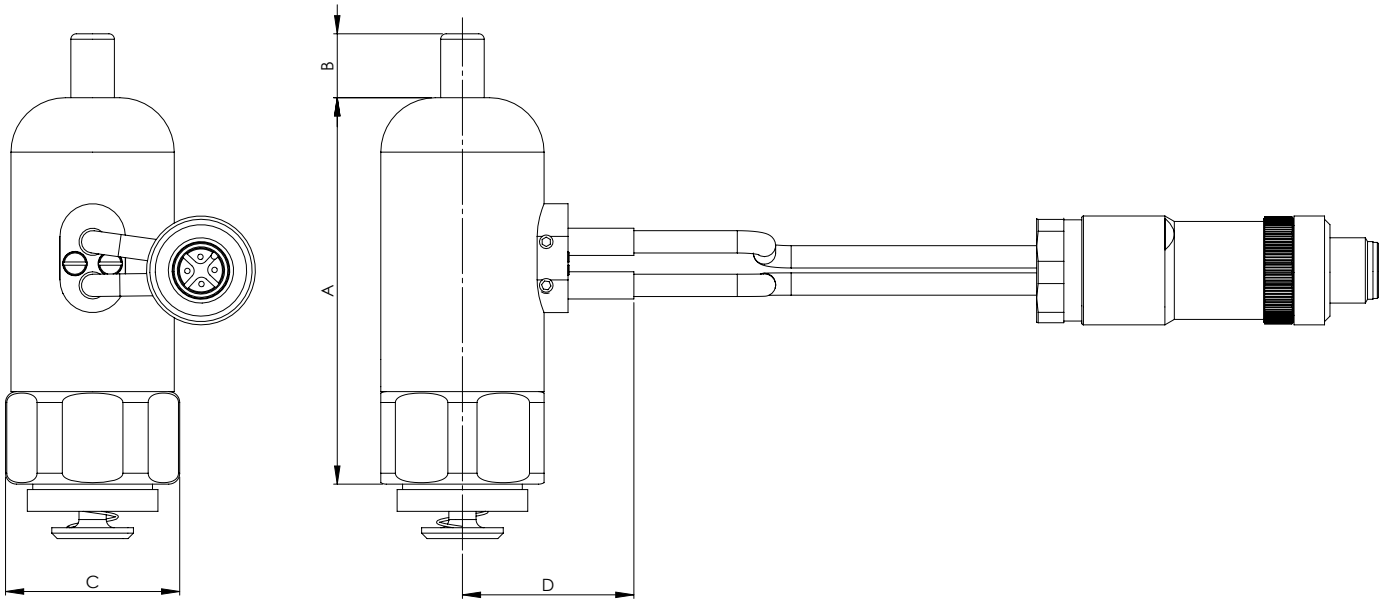

Nominal Dimensions in mm (in.)

Cat. No.	A	B	C	D	Compatible Actuator
PA76/P1	71 (2.795)	20 (0.787)	30 (1.181)	35.5 (-1.398)	PA76/110


The Life Science business of Merck operates as
MilliporeSigma in the U.S. and Canada.

MERCK

Specifications

Net Weight (approximate)	
Indicator	**PA76/P1**
Weight kg (lb)	0.06 (0.13)

Material		
	Body Plastic in Compliance with	**Indicator** Plastic in Compliance with
Material Code	POM C	

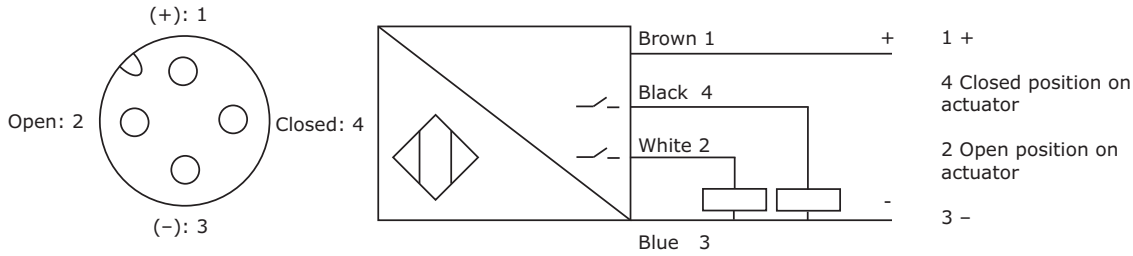

Power Supply	24 VDC
Power Limits	10–30 VDC
Output Current	Max 100 mA in open or closed position, overload and short circuit protection.
No Load Current Consumption	<10 mA
Degree of Protection	IP 67
Cable Length between Detectors and Socket Connection	20 cm (approx.)

Additional Information	
Surface Roughness	Smooth
Environment Temperature	0 to 40 ºC (32 to 104 ºF) Under limited time 70 ºC (158 ºF)
Labeling	Each Indicator is labeled.
Packaging	The Indicator is sealed in a plastic bag.
Quality Control	Our Quality Assurance System guarantees the control and traceability of the product.

Technical Assistance

For more information, please visit **SigmaAldrich.com** for up-to-date worldwide contact information

© 2022 Merck KGaA, Darmstadt, Germany and/or its affiliates. All Rights Reserved. Merck, the vibrant M, Millipore, Sigma-Aldrich, and NovAseptic are trademarks of Merck KGaA, Darmstadt, Germany or its affiliates. All other trademarks are the property of their respective owners. Detailed information on trademarks is available via publicly accessible resources.

Lit No. SP1124EN00 Ver. 1.0
39382
10/2022