
Pre-Sure™ Cap

Make **Sure** first, before removing the cap!

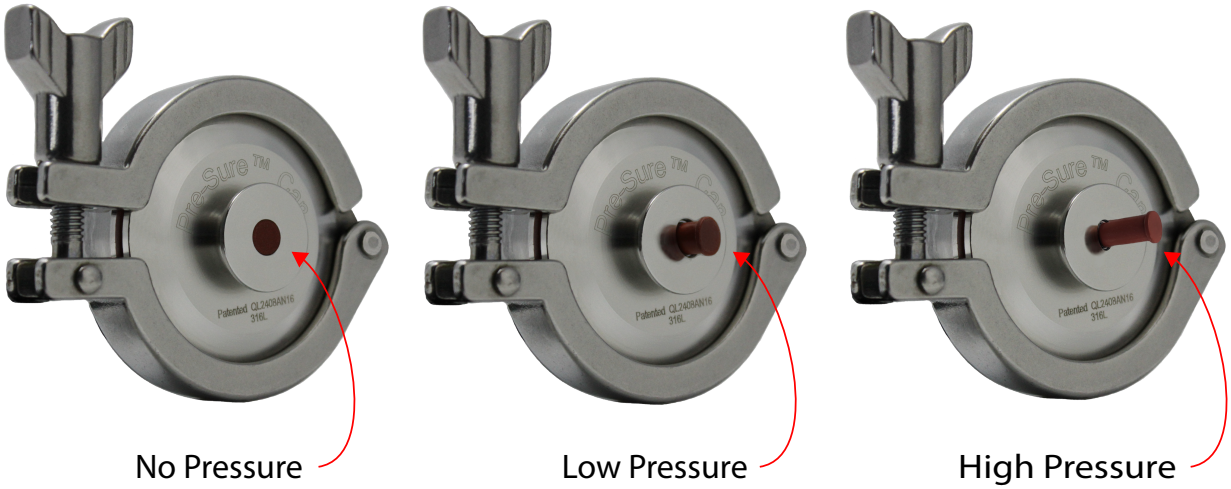

STOP unsafe actions and injuries
STOP expensive clean up

STOP product loss
STOP dangerous cap removal practice


Features

- **USP Class 6 Silicone**
- **316L Stainless Steel**
- **First Indication at 5PSI (35kPA) - indicating fluid in the pipe**
- **Second indication at 15PSI (100kPA) - indicating pressure in the pipe - the opening through the cap is hygienically sealed**
- **In closed position, the button hygienically seals the opening through the gap**
- **Maximum Pressure 200PSI (13.7Bar)**
- **Maximum Temperature 275°F (135°C) - MUST NOT be installed on steam lines**
- **Fail safe design - if diapraghm fails, pressure and product is relieved through the hole in the stainless steel**
- **30,000 cycles or 6 months before replacement**
- **Anti pressure surge(water hammer) protection design**
- **Easy clean and replacement diapraghm design**
- **Safe and easy removal of cap feature incorporated**
- **No springs or power required**
- **Direct replacement for standard cap and seal**



Stainless Steel Pre-sure™ Cap
Part code: 326 020

Easy removal of cap using central handle/knob - fork from clamp can be used under knob if needed.

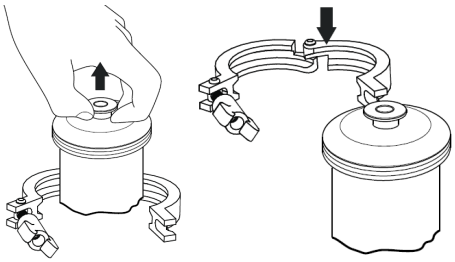



Replaceable Diapragm
Part code: 226 020

Distributed by:

MUST SEE VIDEO